


# **SFL-110 [12V110Ah]**



## Dimensions (mm)

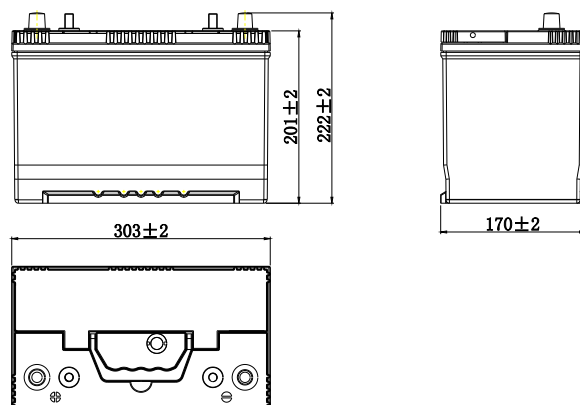


## Physical Specification (mm)

|                          |                             |                                     |
|--------------------------|-----------------------------|-------------------------------------|
| Nominal Voltage          |                             | 12V                                 |
| Nominal Capacity (100HR) |                             | 110Ah                               |
| Dimension                | Length                      | 303±2mm(11.93inches)                |
|                          | Width                       | 170±2mm(6.69inches)                 |
|                          | Container Height            | 201±2mm(7.91inches)                 |
|                          | Total Height(with Terminal) | 222±2mm(8.74inches)                 |
| Weight                   |                             | Approx 21.1Kg(46.5lbs)              |
| Acid                     |                             | 1.280±0.015g/cm <sup>3</sup> (25°C) |
| Standard Terminal        |                             | 12                                  |
| Cell layout              |                             | 1                                   |
| Hold-Down                |                             | B1                                  |
| Cell plate qty           |                             | /                                   |
| Case                     |                             | Black-PP Material                   |
| Cover                    |                             | Black-PP Material                   |
| Handle                   |                             | Black-Material                      |
| QTY/PLT/layer            |                             |                                     |


## Electrical Specification

|   |                      |        |
|---|----------------------|--------|
| Rated Capacity                            | 100 hour rate(4.15A) | 110Ah  |
| Reserve Capacity                          |                      | 145min |
| Cold Cranking Performance Amps@0°F(-18°C) |                      | 700A   |

## Discharge Characteristics(25°C,70°F)

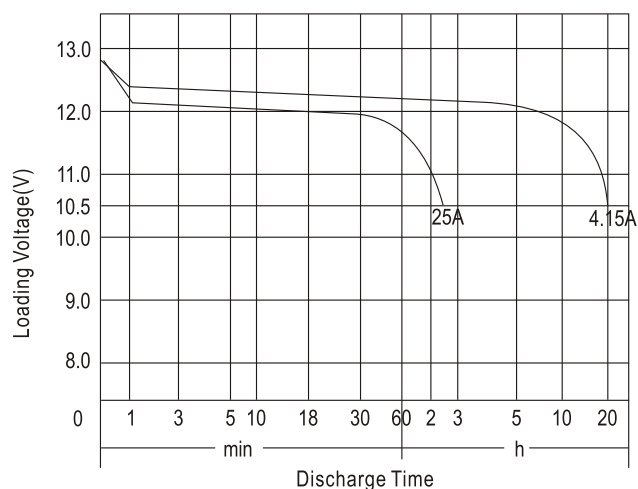

## Standard Terminal (mm)

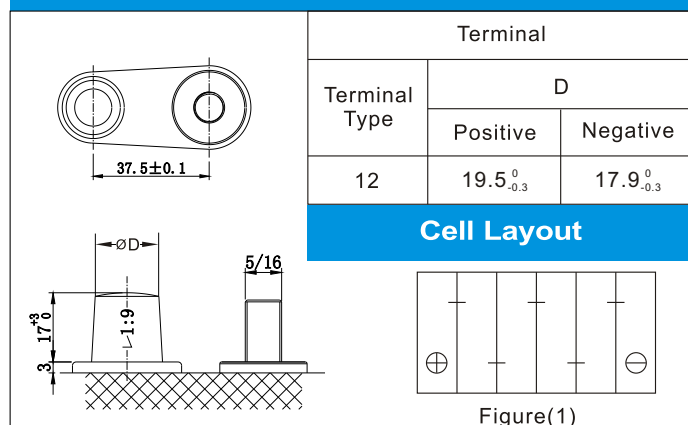

## Discharge Characteristics(-18°C,0°F)

