



NOCO BOOST®

12V 4000A

12.8.v



12V 2000A



12V OUT



SPORT™

12V 500A



NOCO®

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

START DEAD BATTERIES.™

NOCO Boost is the safest, most-extensive brand of lithium jump starters in the world, featuring the most advanced safety and battery technology compared to any other brand.



**#1 SELLING
BRAND**

**LITHIUM
POWERED**

**12V & 24V
MODELS**

**ULTRASAFE®
DESIGN**



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY


THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

IMPROVED PERFORMANCE. IMPROVED DESIGN.

Boost is a highly engineered product, built for safety, durability and reliability - now more powerful than ever before.

UP TO
30%
MORE POWER.

MOST ADVANCED
DESIGN. EVER.

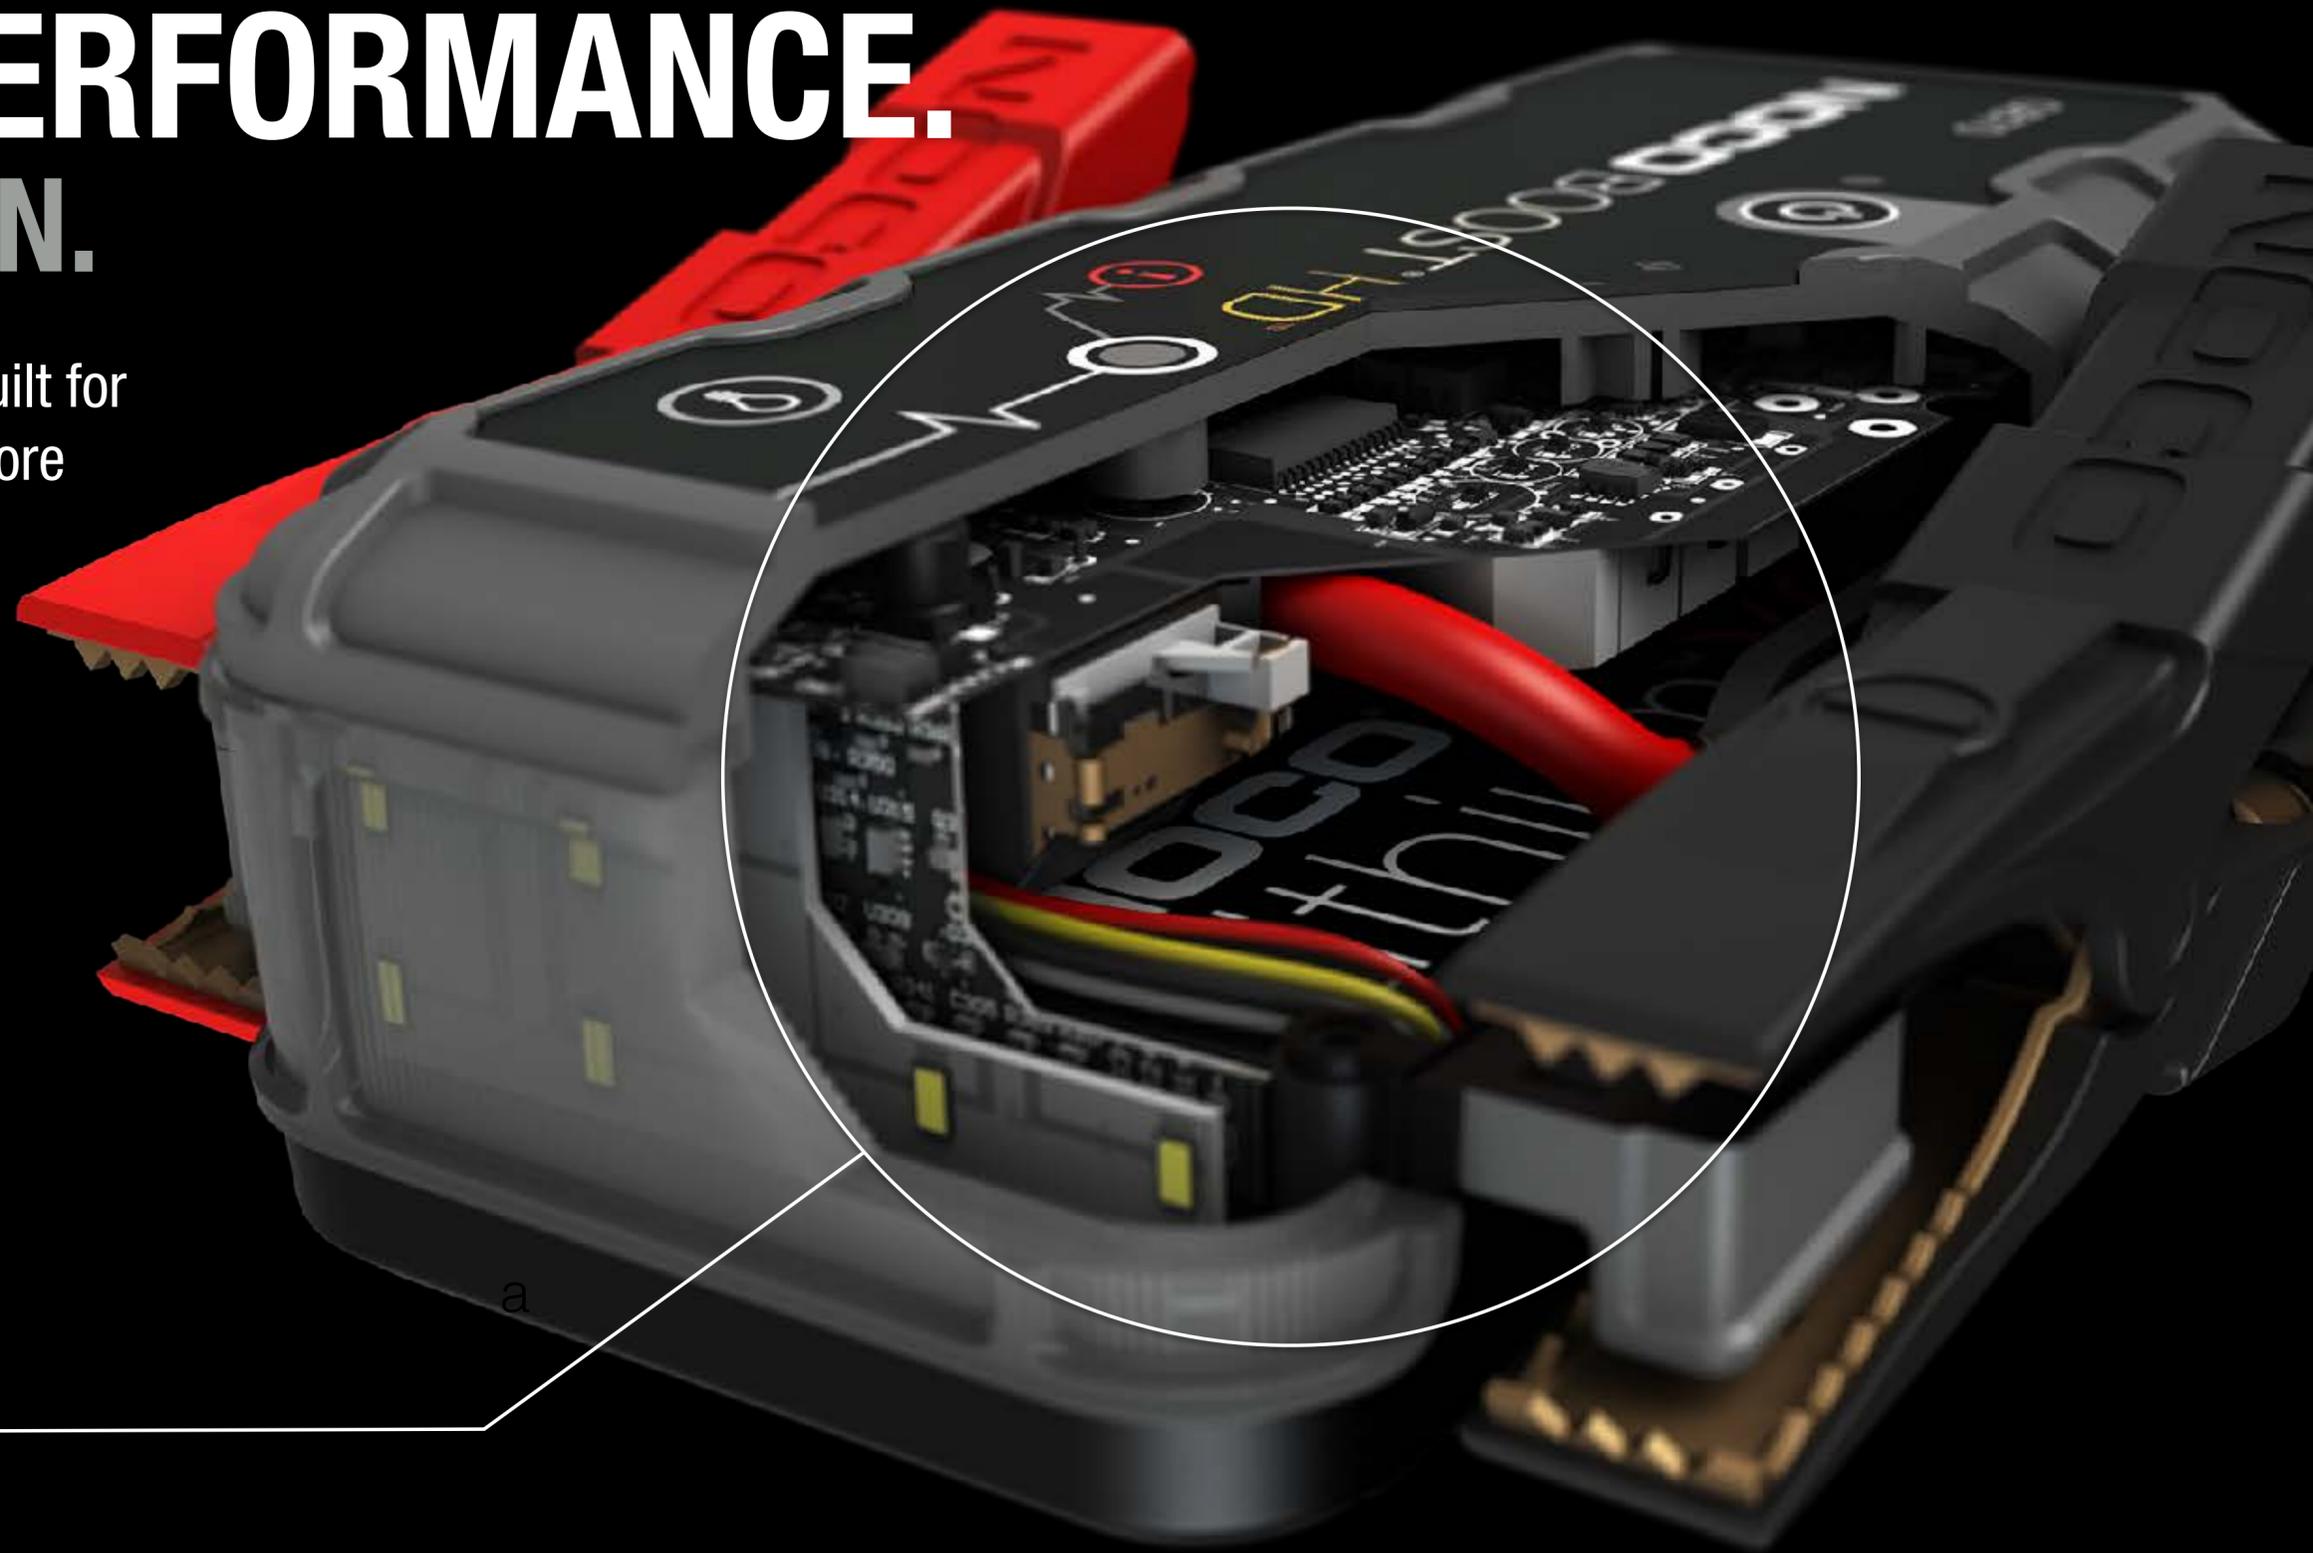

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 4

NOCO[®]

INCREDIBLE POWER. COMPACT DESIGN.

Ultra-portable, lightweight and compact, Boost's lithium-ion technology is built to jump start 12-volt batteries. The NOCO Boost jump starters outperform traditional lead-acid battery booster packs at a fraction of the size and weight. Conveniently store in a center console, trunk, or toolbox.



8X
SMALLER

8X
LIGHTER

15%
MORE POWER

GB20 VS LEAD ACID EQUIVALENT

NOCO

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 5

OUTPERFORM. POWER FOR POWER.

The **GB500 BOOST MAX** packs more power at only **19 lbs** compared to the **152 lb** average lead-acid competitor. Defeats all other 12V/24V jump starters on the market.



GB500 VS LEAD ACID EQUIVALENT

8X
SMALLER

16X
LIGHTER

30%
MORE POWER



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 6

HIGH-DISCHARGE. ADVANCED LITHIUM TECHNOLOGY.

New and improved internal Lithium batteries offering peak power and performance for all BOOST units.



SIMPLIFIED. INTUITIVE USER INTERFACE.

A more simplified and improved user interface for improved readability and redesigned Charge LEDs. Cold and Hot Smart Indicators for **GB50 BOOST XL** indicate when the unit is reaching the upper and lower limits of its temperature range.



USB POWER. CHARGE & RECHARGE

Recharges and charges completely via USB. Recharge from any USB power source (e.g., AC charger, laptop, car charger), or charge devices like smartphones, tablets, and much more.



Charge devices.
2.1A USB OUT

Recharge Boost.
2.1A MICRO
USB IN



TACTICAL GRADE. HIGH-LUMEN FLASHLIGHT.

A rechargeable lithium-powered **LED flashlight** provides a tactical-grade experience with long-range, ultra-bright illumination, controllable luminosity, and emergency modes.



STROBE
SOS
25%
50%
75%
100%



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF MADE IN ELECTRONIC OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

PORTABLE POWER. POWER 12-VOLT DEVICES.

Power your favorite 12-volt devices, like a car jack, tire inflator, power inverter, coffee maker, fan and much more with the **GB70 BOOST HD** and **GB150 BOOST PRO**.



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 11

RAPID RECHARGE. FROM 0-100% 4X FASTER.

Charge directly from the vehicle's 12-volt auxiliary port or the XGC4 4-Amp Power Adapter to recharge the **GB70 BOOST HD** and **GB150 BOOST PRO** up to 4X faster.

Optional
**XGC4 56W XGC
Power Adapter**
recharges Boost
from home.



12V Port

12V IN

INTEGRATED VOLTMETER. UNDERSTAND THE PROBLEM.

The **GB150 BOOST PRO** has a built-in digital voltmeter that shows the connected batteries voltage, allowing the user to determine if its a battery issue or something else.



DESIGNED TOUGH.





PROTECTS AGAINST WATER, DIRT, DUST, AND MORE.



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 15

REDESIGNED PRECISION CLAMPS. MAXIMUM VERSATILITY. MORE POWER.

From needle-nose profiles for smaller terminal applications to offering heavy-duty, full-force clamping ability and high-gauge cables, each Boost unit is paired with its ultimate clamp design.



GB20 8 AWG
Precision Clamps
w/ Integrated Eyelets

GB40 8 AWG
HD Precision Clamps

GB70 6 AWG
HD Precision Clamps

GB150 4 AWG
HD Clamps

UP TO 40% WIDER CLAMPING RANGE.

Designed to fit battery terminals of any shape and size. Engineered for improved clamping range, clamping force, and higher conductivity.



GB20 8 AWG
Precision Clamps
w/ Integrated Eyelets



GB40 8 AWG
HD Precision Clamps



GB70 6 AWG
HD Precision Clamps



GB150 4 AWG
HD Clamps

NOCO BOOST[®]

ULTRASAFE[®] LITHIUM JUMP STARTERS.



GB20

BOOST[®] SPORT[™]



GB40

BOOST[®] PLUS[™]



GB50

BOOST[®] XL[™]



GB70

BOOST[®] HD[™]



GB150

BOOST[®] PRO[™]

GB20 BOOST[®] SPORT[™] ULTRASAFE[®] JUMP STARTER

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



12V 500A

4L GAS

20 JUMP STARTS
PER CHARGE

LED FLASHLIGHT
100-LUMEN
SEVEN LIGHT MODES



What's In The Box

- GB20 Lithium Jump Starter
- Precision Battery Clamps
- 12V Car Charger
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Retail Packaging

Dimensions: 3.62"x4.57"x8.27"
Weight: 2.69lbs
UPC: 0-46221-15001-8

Inner Carton:

Dimensions: 4.01"x8.78"x5.12"
Weight: 2.87lbs

Master Carton:

Dimensions: 9.25"x12.60"x11.22"
Weight: 18.08lbs
Quantity: 6
UCC: 10046221150015

Units Per Pallet:

270 Units

NOCO[®]

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 19



GB20 BOOST[®] SPORT[™] TECH SPECS

ULTRASAFE[®] JUMP STARTER

OVERVIEW

TECH SPECS

COMPARE

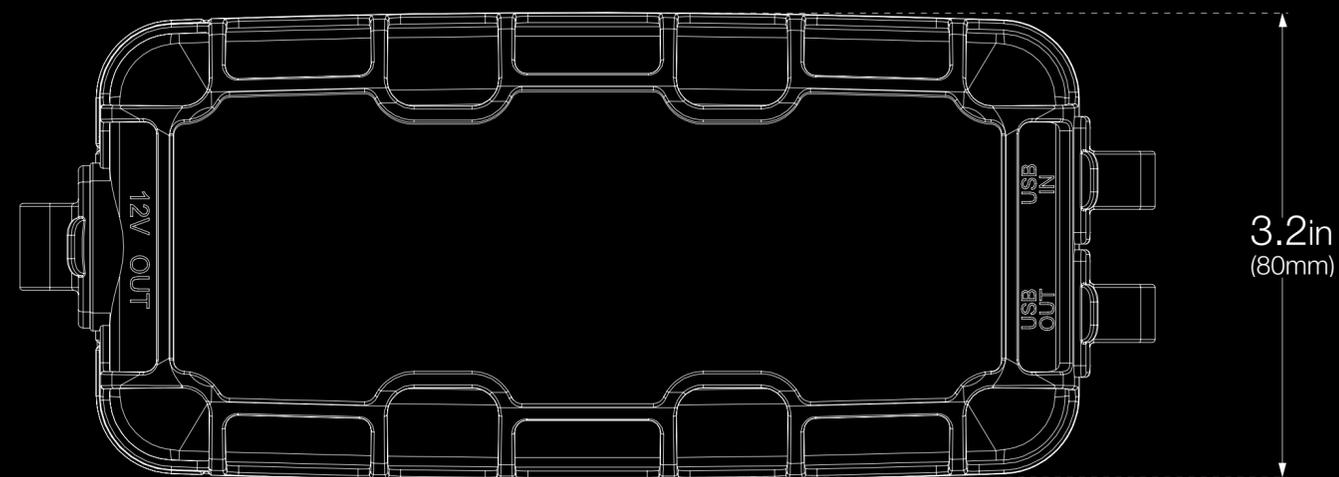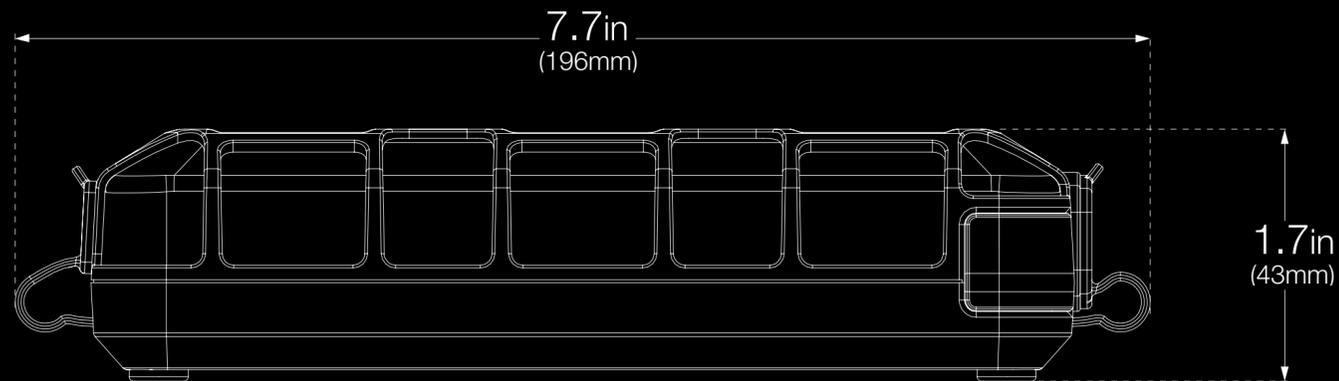

Operating Requirements

Operating Temperature: -7.6° to 122° F (-20° to +50° C)

Charging Temperature: -32° to 104° F (0° to +40° C)

Storage Temperature: -7.6° to 122° F (-20° to +50° C)

Relative Humidity: 0 to 95% Non-Condensing

Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: 4.0L

Diesel Engine Size: Not Recommended

Jumps Per Charge: 20X

Peak Current: 500 Amps

Battery Types: 12V Lead-Acid Only

(Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 100L

Number of Modes: 7X

(100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes

Open-Circuit: Yes

Over-heating: Yes

Over-charge: Yes

Spark-Proof: Yes

Reverse Polarity: Yes

Protection

IP Rating: IP65

Size and Weight

Height: 7.7 Inches (196 mm)

Width: 3.2 Inches (80 mm)

Depth: 1.7 Inches (43 mm)

Weight: 2.1 Pounds (1.08 kg)

Charging

Micro USB (Input): 5V, 2.1A

Micro USB (Output): 5V, 2.1A

Recharge Time: 6hr (1A)

Internal Battery

Capacity: 2150mAh

Watt Hours: 24Wh

Chemistry: Lithium Nickel Manganese Cobalt

Charge Cycles: Over 1000X

Charge Length: Holds 70% Charge Over A Year

Clamps

Type: Precision Clamps

Span: 19.5 Inches (49.5 cm)

Wire Size: 8 AWG

Limited Warranty

1-Year Limited Warranty

GB40 BOOST[®] PLUS[™] ULTRASAFE[®] JUMP STARTER

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



12V 1000A

6L GAS
3L DIESEL

20 JUMP STARTS
PER CHARGE

LED FLASHLIGHT
100-LUMEN
SEVEN LIGHT MODES



What's In The Box

- GB40 Lithium Jump Starter
- Heavy-Duty Battery Clamps
- 12V Car Charger
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Retail Packaging

Dimensions: 3.62"x4.57"x8.27"
Weight: 2.75lbs
UPC: 0-46221-15002-5

Inner Carton:

Dimensions: 4.01"x8.78"x5.12"
Weight: 2.89lbs

Master Carton:

Dimensions: 9.25"x12.60"x11.22"
Weight: 18.30lbs
Quantity: 6
UCC: 10046221150022

Units Per Pallet:

270 Units

NOCO[®]

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 21



GB40 BOOST[®] PLUS[™] TECH SPECS

ULTRASAFE[®] JUMP STARTER

OVERVIEW

TECH SPECS

COMPARE

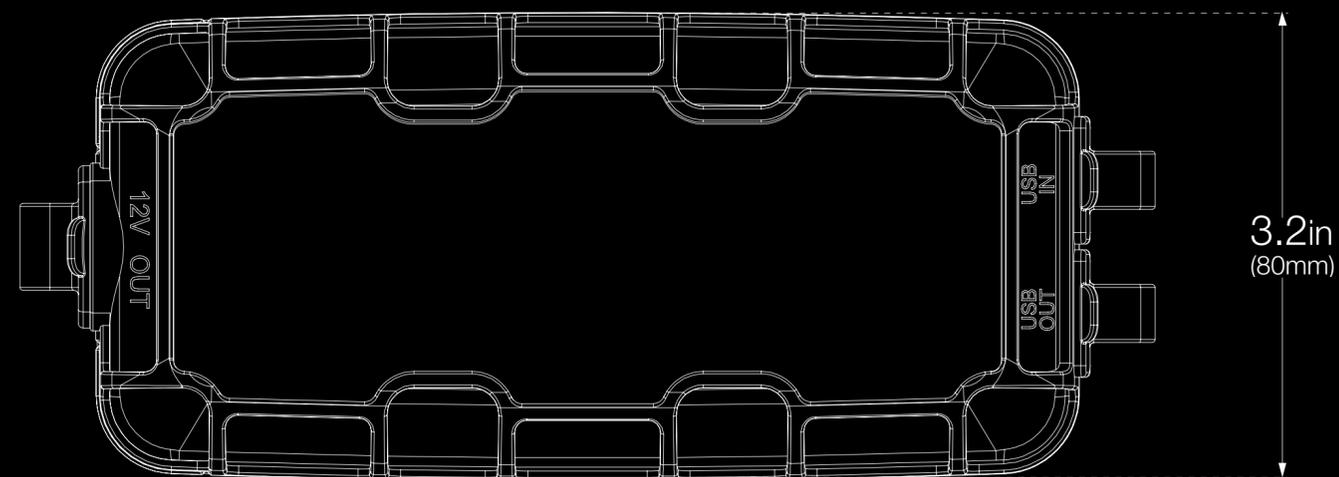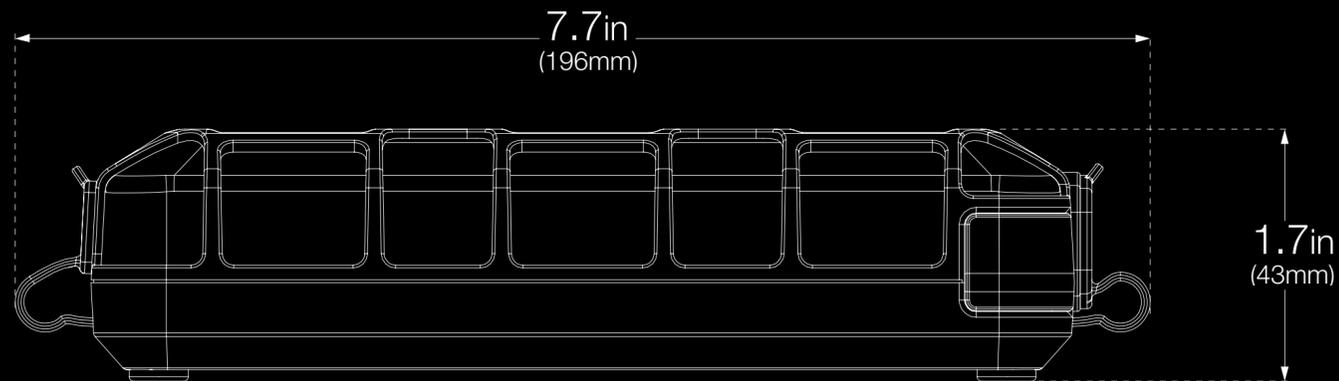

Operating Requirements

Operating Temperature: -7.6° to 122° F (-20° to +50° C)

Charging Temperature: -32° to 104° F (0° to +40° C)

Storage Temperature: -7.6° to 122° F (-20° to +50° C)

Relative Humidity: 0 to 95% Non-Condensing

Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: 6.0L

Diesel Engine Size: 3.0L

Jumps Per Charge: 20X

Peak Current: 1000 Amps

Battery Types: 12V Lead-Acid Only

(Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 100L

Number of Modes: 7X

(100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes

Open-Circuit: Yes

Over-heating: Yes

Over-charge: Yes

Spark-Proof: Yes

Reverse Polarity: Yes

Protection

IP Rating: IP65

Size and Weight

Height: 7.7 Inches (196 mm)

Width: 3.2 Inches (80 mm)

Depth: 1.7 Inches (43 mm)

Weight: 2.4 Pounds (1.08 kg)

Charging

Micro USB (Input): 5V, 2.1A

Micro USB (Output): 5V, 2.1A

Recharge Time: 6hr (1A)

Internal Battery

Capacity: 2150mAh

Watt Hours: 24Wh

Chemistry: Lithium Nickel Manganese Cobalt

Charge Cycles: Over 1000X

Charge Length: Holds 70% Charge Over A Year

Clamps

Type: HD Precision Clamps

Span: 23 Inches (58.4 cm)

Wire Size: 8 AWG

Limited Warranty

1-Year Limited Warranty

GB50 BOOST[®] XL[™] ULTRASAFE[®] JUMP STARTER



12V 1500A

**7L GAS
4.5L DIESEL**

**30 JUMP STARTS
PER CHARGE**

**LED FLASHLIGHT
200-LUMEN
SEVEN LIGHT MODES**

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



What's In The Box

- GB50 Lithium Jump Starter
- Heavy-Duty Battery Clamps
- 12V Car Charger
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Retail Packaging

Dimensions: 3.9"x4.7"x9.1"
Weight: 3.35lbs
UPC: 0-46221-18017-6

Inner Carton:

Dimensions: 4.13"x9.37"x5.27"
Weight: 3.51lbs

Master Carton:

Dimensions: 10.25"x13.50"x11.34"
Weight: 22.11lbs
Quantity: 6
UCC: 10046221180173

Units Per Pallet:

234 Units



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

GB50 BOOST[®] XL[™]



ULTRASAFE[®] JUMP STARTER

TECH SPECS

OVERVIEW

TECH SPECS

COMPARE

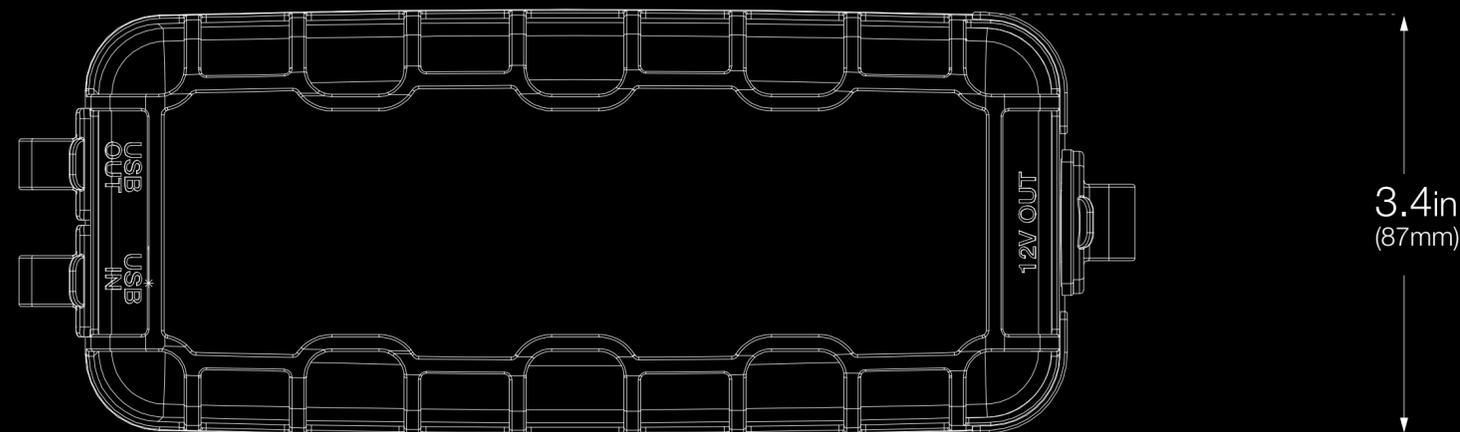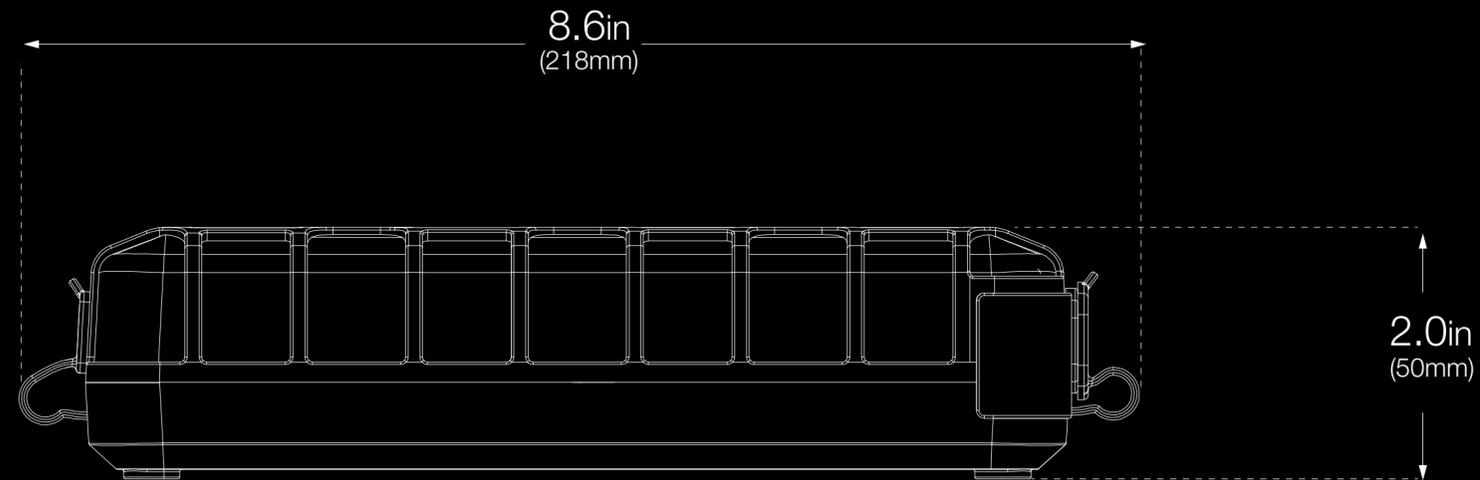

Operating Requirements

Operating Temperature: -7.6° to 122° F (-20° to +50° C)

Charging Temperature: -32° to 104° F (0° to +40° C)

Storage Temperature: -7.6° to 122° F (-20° to +50° C)

Relative Humidity: 0 to 95% Non-Condensing

Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: 7.0L

Diesel Engine Size: 4.5L

Jumps Per Charge: 30X

Peak Current: 1,500 Amps

Battery Types: 12V Lead-Acid Only
(Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 200L

Number of Modes: 7X
(100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes

Open-Circuit: Yes

Over-heating: Yes

Over-charge: Yes

Spark-Proof: Yes

Reverse Polarity: Yes

Protection

IP Rating: IP65

Size and Weight

Height: 8.6 Inches (218 mm)

Width: 3.4 Inches (87 mm)

Depth: 2.0 Inches (50 mm)

Weight: 3 Pounds (1.36 kg)

Charging

Micro USB (Input): 5V, 2.1A

Micro USB (Output): 5V, 2.1A

Recharge Time: 9hr (1A)

Internal Battery

Capacity: 3150mAh

Watt Hours: 35Wh

Chemistry: Lithium Nickel Manganese Cobalt

Charge Cycles: Over 1000X

Charge Length: Holds 70% Charge Over A Year

Clamps

Type: HD Precision Clamps

Span: 23 Inches (58.4 cm)

Wire Size: 8 AWG

Limited Warranty

1-Year Limited Warranty

GB70 BOOST[®] HD[™] ULTRASAFE[®] JUMP STARTER



12V 2000A

**8L GAS
6L DIESEL**

**40 JUMP STARTS
PER CHARGE**

**LED FLASHLIGHT
400-LUMEN
SEVEN LIGHT MODES**

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



What's In The Box

- GB70 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Retail Packaging

Dimensions: 7.28"x4.84"x9.80"
Weight: 5.09lbs
UPC: 0-46221-15005-6

Inner Carton:

Dimensions: 10.27"x7.72"x5.39"
Weight: 5.44lbs

Master Carton:

Dimensions: 15.98"x10.83"x11.50"
Weight: 22.60lbs
Quantity: 4
UCC: 10046221150053

Units Per Pallet:

120 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.



GB70 BOOST[®] HD[™]


ULTRASAFE[®] JUMP STARTER

TECH SPECS

OVERVIEW

TECH SPECS

COMPARE

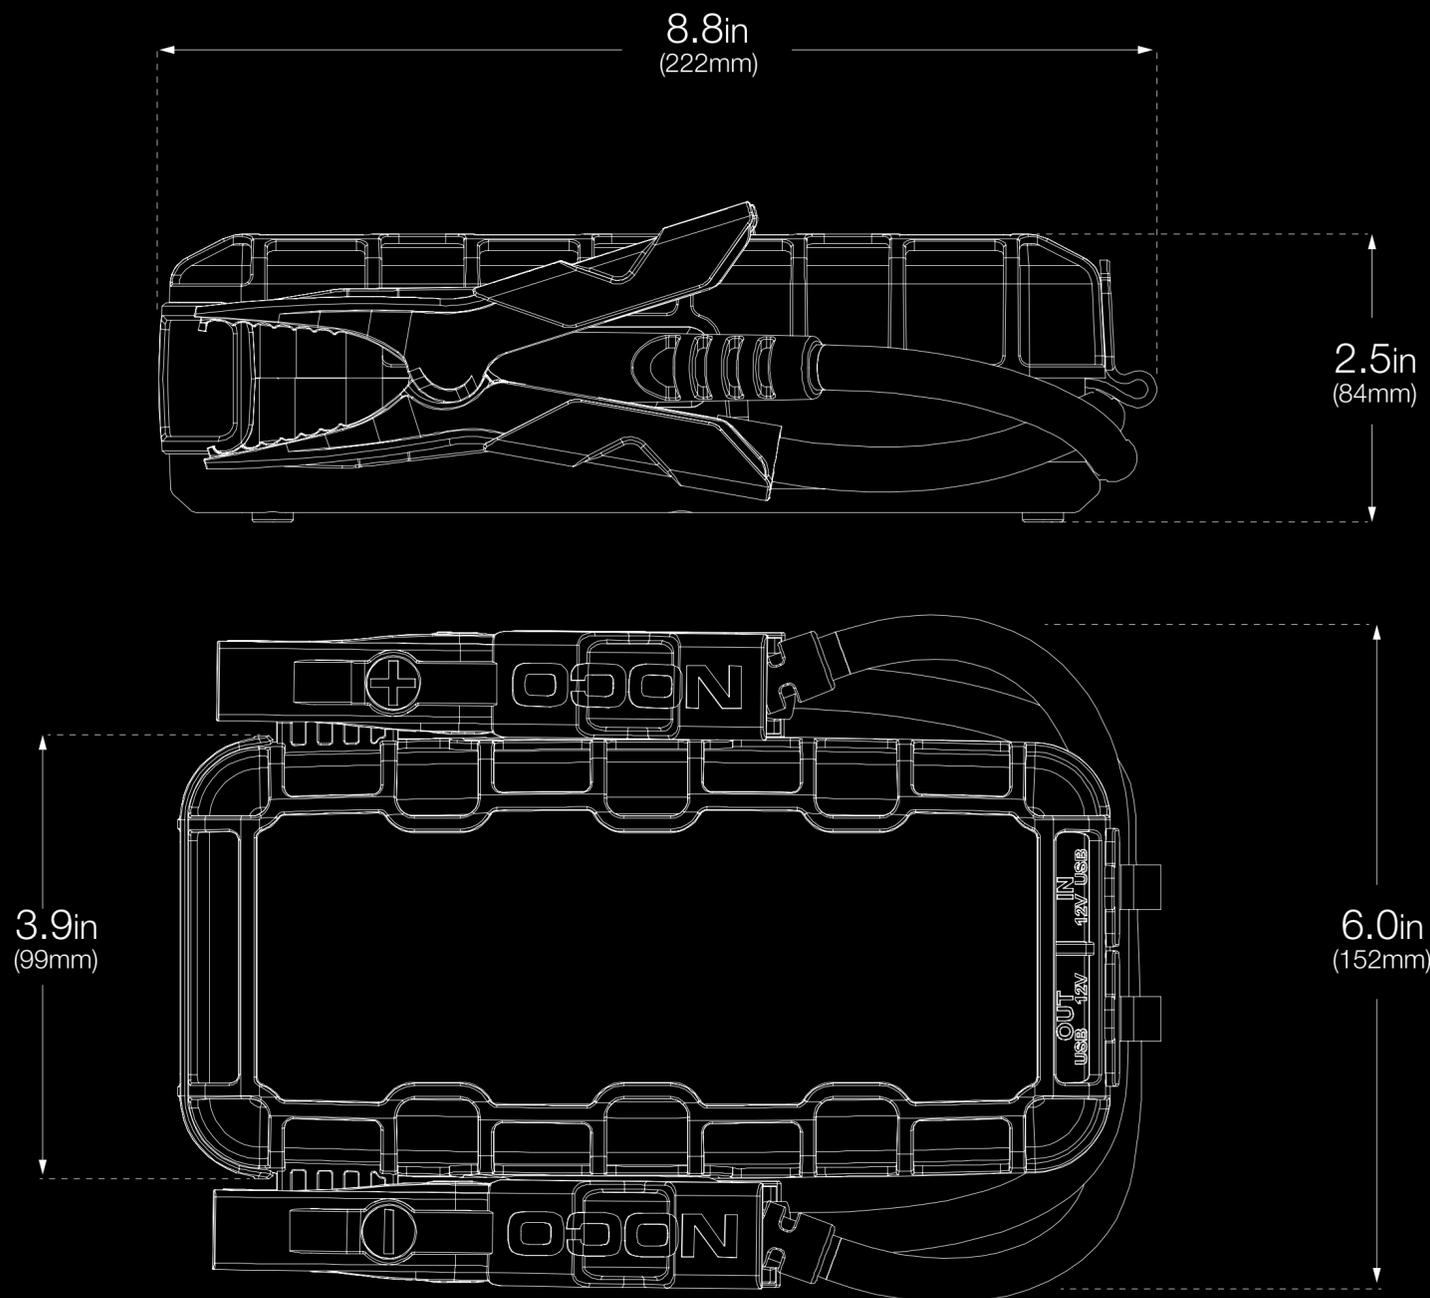

Operating Requirements

Operating Temperature: -7.6° to 122° F (-20° to +50° C)
Charging Temperature: -32° to 104° F (0° to +40° C)
Storage Temperature: -7.6° to 122° F (-20° to +50° C)
Relative Humidity: 0 to 95% Non-Condensing
Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: 8.0L
Diesel Engine Size: 6.0L
Jumps Per Charge: 40X
Peak Current: 2,000 Amps
Battery Types: 12V Lead-Acid Only
 (Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 400L
Number of Modes: 7X
 (100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes
Open-Circuit: Yes
Over-heating: Yes
Over-charge: Yes
Spark-Proof: Yes
Reverse Polarity: Yes

Protection

IP Rating: IP65

Height: 8.8 Inches (222 mm)
Width: 6.0 Inches (152 mm)
Depth: 2.5 Inches (84 mm)
Weight: 5 Pounds (2.27 kg)

Charging

Micro USB (Input): 5V, 2.1A
Micro USB (Output): 5V, 2.1A
12V (Input): 12V (3A)
12V (Output): 12V (15A)
Recharge Time: 14hr (1A) / 2-3 hrs (12V Fast)

Internal Battery

Capacity: 5000mAh
Watt Hours: 56Wh
Chemistry: Lithium Nickel Manganese Cobalt
Charge Cycles: Over 1000X
Charge Length: Holds 70% Charge Over A Year

Clamps

Type: HD Precision Clamps
Span: 33.5 Inches (85.09 cm)
Wire Size: 8AWG

Limited Warranty

1-Year Limited Warranty

GB150 BOOST[®] PRO[™] ULTRASAFE[®] JUMP STARTER

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



12V 4000A

10L+ GAS
10L+ DIESEL

80 JUMP STARTS
PER CHARGE

LED FLASHLIGHT
500-LUMEN
SEVEN LIGHT MODES



BUILT-IN DIGITAL VOLTMETER DISPLAY

What's In The Box

- GB150 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

Retail Packaging

Dimensions: 8.19"x4.88"x13.70"
Weight: 8.00lbs
UPC: 0-46221-15006-3

Inner Carton:

Dimensions: 14.09"x8.78"x5.79"
Weight: 8.46lbs

Master Carton:

Dimensions: 14.76"x9.25"x12.50"
Weight: 17.97lbs
Quantity: 2
UCC: 10046221150060

Units Per Pallet:

72 Units

NOCO[®]

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 27



GB150 BOOST[®] PRO[™] TECH SPECS

ULTRASAFE[®] JUMP STARTER

OVERVIEW

TECH SPECS

COMPARE

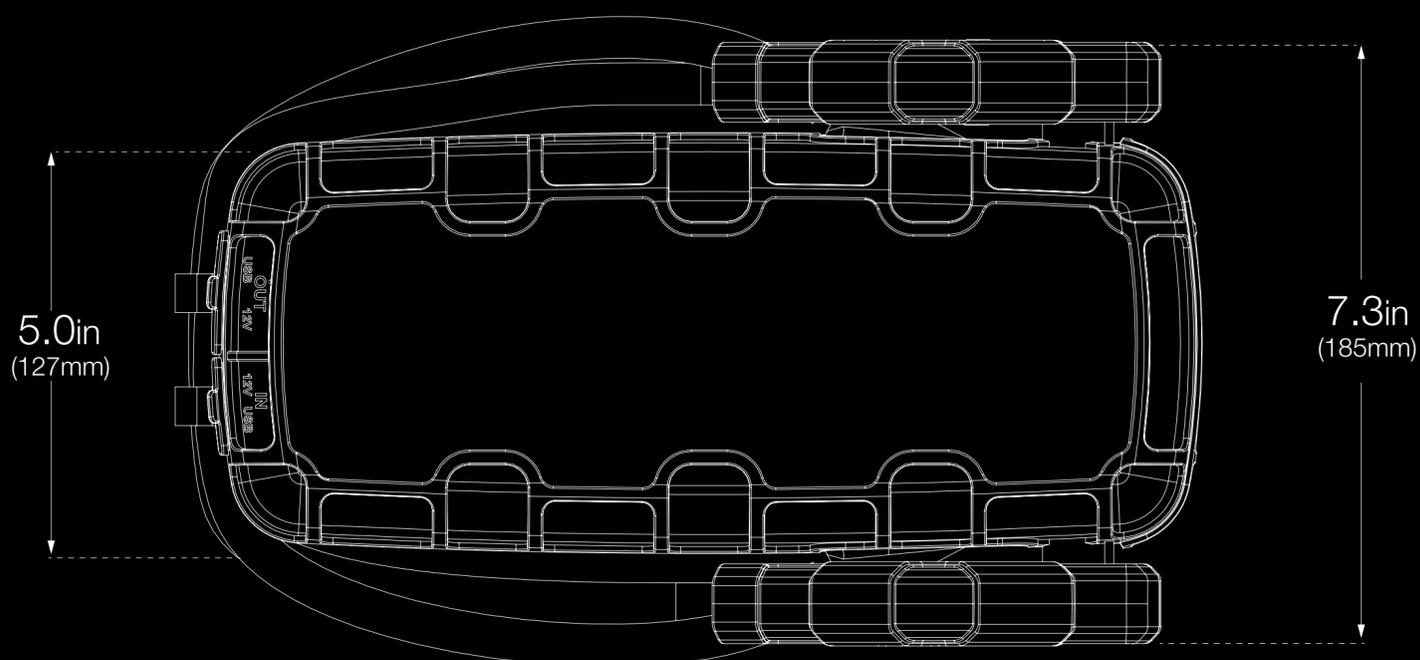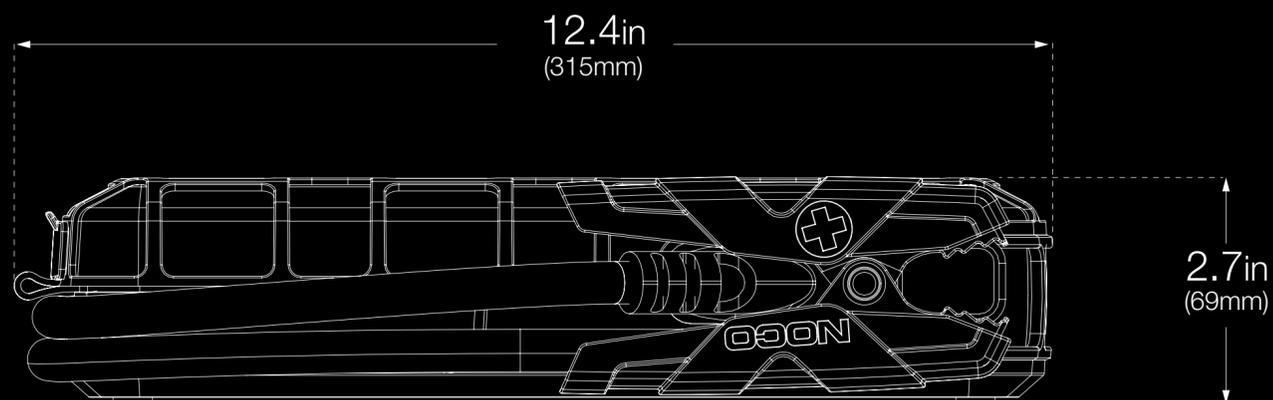

Operating Requirements

Operating Temperature: -7.6° to 122° F (-20° to +50° C)

Charging Temperature: -32° to 104° F (0° to +40° C)

Storage Temperature: -7.6° to 122° F (-20° to +50° C)

Relative Humidity: 0 to 95% Non-Condensing

Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: 10.0L

Diesel Engine Size: 10.0L

Jumps Per Charge: 80X

Peak Current: 4,000 Amps

Battery Types: 12V Lead-Acid Only

(Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 500L

Number of Modes: 7X

(100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes

Open-Circuit: Yes

Over-heating: Yes

Over-charge: Yes

Spark-Proof: Yes

Reverse Polarity: Yes

Protection

IP Rating: IP65

Size and Weight

Height: 12.4 Inches (315 mm)

Width: 7.3 Inches (185 mm)

Depth: 2.7 Inches (69 mm)

Weight: 7.5 Pounds (3.4 kg)

Charging

Micro USB (Input): 5V, 2.1A

Micro USB (Output): 5V, 2.1A

12V (Input): 12V (5A)

12V (Output): 12V (15A)

Recharge Time: 22hr (1A) / 2-3 hrs (12V Fast)

Internal Battery

Capacity: 8000mAh

Watt Hours: 89Wh

Chemistry: Lithium Nickel Manganese Cobalt

Charge Cycles: Over 1000X

Charge Length: Holds 70% Charge Over A Year

Clamps

Type: HD Clamps

Span: 50.5 Inches (128.3 cm)

Wire Size: 4AWG

Limited Warranty

1-Year Limited Warranty

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

BOOST PRODUCT LINE OVERVIEW



GB20 BOOST [®] SPORT [™]	GB40 BOOST [®] PLUS [™]	GB50 BOOST [®] XL [™]	GB70 BOOST [®] HD [™]	GB150 BOOST [®] PRO [™]
500A CURRENT RATING	1000A CURRENT RATING	1500A CURRENT RATING	2000A CURRENT RATING	4000A CURRENT RATING
20X JUMP STARTS PER CHARGE	20X JUMP STARTS PER CHARGE	30X JUMP STARTS PER CHARGE	40X JUMP STARTS PER CHARGE	80X JUMP STARTS PER CHARGE
4.0L GAS ONLY	6.0L GAS 3.0L DIESEL	7.0L GAS 4.5L DIESEL	8.0L GAS 6.0L DIESEL	10.0L GAS & DIESEL
100 LUMEN FLASHLIGHT	100 LUMEN FLASHLIGHT	200 LUMEN FLASHLIGHT	400 LUMEN FLASHLIGHT	800 LUMEN FLASHLIGHT
USB IN & OUT	USB IN & OUT	USB IN & OUT	USB IN & OUT	USB IN & OUT
			12V SUPPLY MODE	12V SUPPLY MODE
			36W FAST CHARGE	56W FAST CHARGE
				INTEGRATED VOLTMETER

NOCO BOOST[®]MAX[™]

COMMERCIAL GRADE JUMP STARTERS.



GB500
BOOST[®]MAX[™]

GB500 BOOST[®] MAX[™] ULTRASAFE[®] JUMP STARTER



12V 20000A
24V 10000A

**CLASS 8+ &
CLASS CE
GAS & DIESEL**

**80 JUMP STARTS
PER CHARGE**

**VOLTMETER
BUILT-IN DIGITAL
VOLTAGE DISPLAY**

JUMPSTARTERS

ACCESSORIES

OVERVIEW

TECH SPECS

COMPARE



What's In The Box

- GB500 Lithium Jump Starter
- Boost Max 24-Inch 2/0 AWG Connectors
- 56-Watt XGC Power Adapter
- 12-Volt Female Plug
- 12-Volt Male Plug
- Protective Carrying Case
- User Guide & Warranty Information

Retail Packaging

Dimensions: 8.19"x4.88"x13.70"
Weight: 8.00lbs
UPC: 0-46221-15006-3

Inner Carton:

Dimensions: 14.09"x8.78"x5.79"
Weight: 8.46lbs

Master Carton:

Dimensions: 14.76"x9.25"x12.50"
Weight: 17.97lbs
Quantity: 2
UCC: 10046221150060

Units Per Pallet:

72 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.



GB500 BOOST[®] MAX[™] TECH

ULTRASAFE[®] JUMP STARTER SPECS

OVERVIEW

TECH SPECS

COMPARE

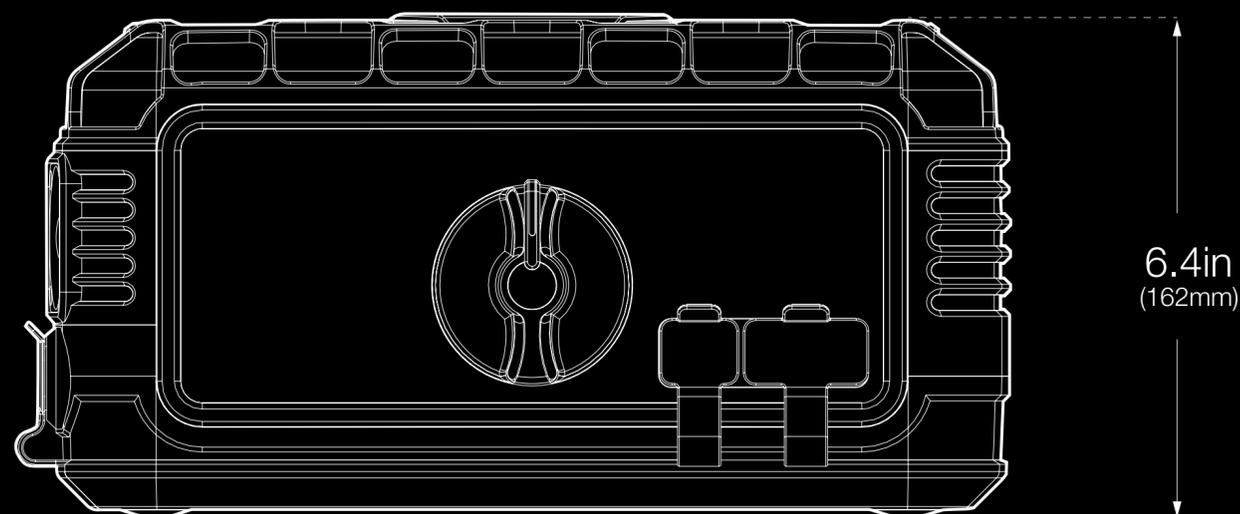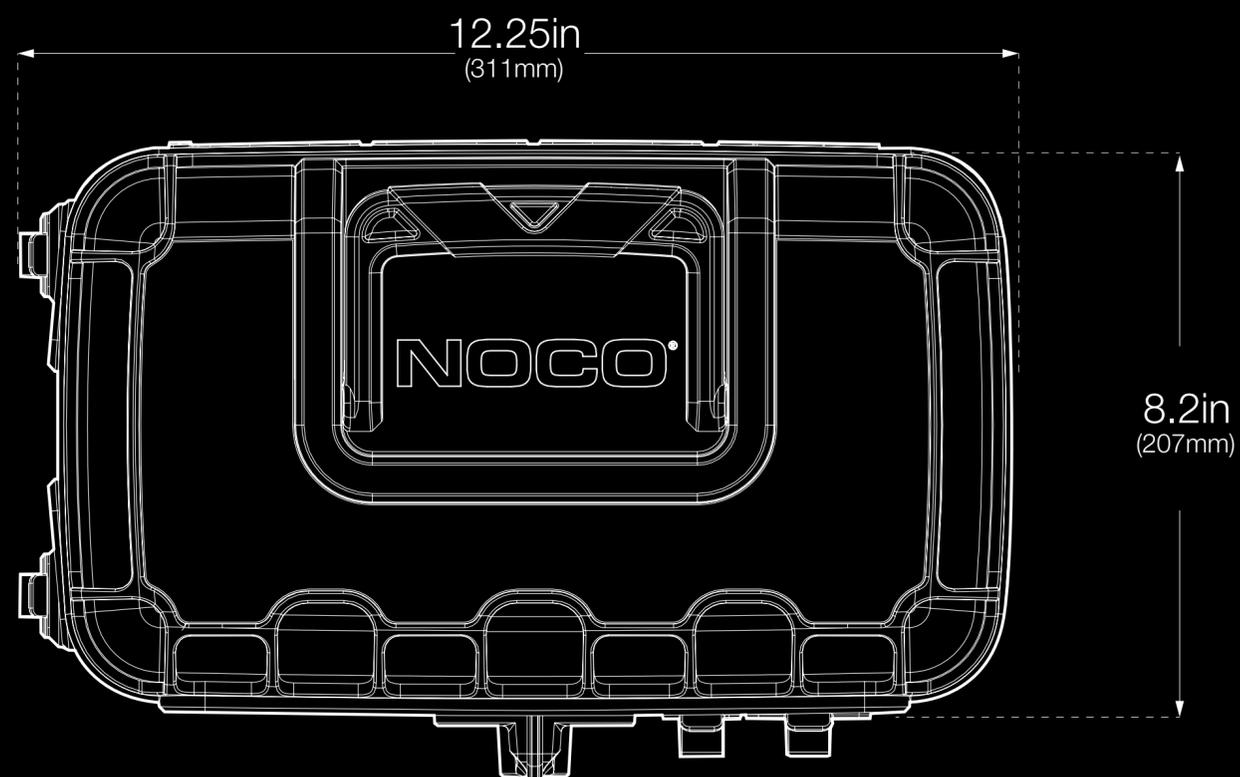6.4in
(162mm)12.25in
(311mm)8.2in
(207mm)

Operating Requirements

Operating Temperature: -22° to 122° F (-30° to +50° C)

Charging Temperature: -22° to 104° F (-30° to +40° C)

Storage Temperature: -4° to 122° F (-20° to +50° C)

Relative Humidity: 0 to 95% Non-Condensing

Cooling: Natural Convection

Jump Starting

Gasoline Engine Size: Up To Class 8+/CE

Diesel Engine Size: Up To Class 8+/CE

Jumps Per Charge: 400X

Peak Current: 20,000 Amps

Battery Types: 12 & 24V Lead-Acid

(Wet, Gel, MF, EFB, AGM)

Flashlight

Lumens (LED's): 2,200

Number of Modes: 7X

(100%, 50%, 10%, SOS, Blink, Strobe, Off)

Safety

Over-Current: Yes

Open-Circuit: Yes

Over-heating: Yes

Over-charge: Yes

Spark-Proof: Yes

Reverse Polarity: Yes

Protection

IP Rating: IP65

Size and Weight

Height: 12.3 Inches (311 mm)

Width: 8.2 Inches (207 mm)

Depth: 6.4 Inches (162 mm)

Weight: 19.25 Pounds (8.73 kg)

Charging

Micro USB (Input): 5V, 2.1A

Micro USB (Output): 5V, 2.1A (2X)

12V (Input): 12V (4A)

12V (Output): 12V (15A)

Recharge Time: 22hr (1A) / 2-3 hrs (12V Fast)

Internal Battery

Capacity: 24000mAh

Watt Hours: 266Wh

Chemistry: Lithium Nickel Manganese Cobalt

Charge Cycles: Over 1000X

Charge Length: Holds 70% Charge Over A Year

Clamps

Type: HD Clamps

Cable Span: 48 Inches (122 cm)

Wire Size: 2/0 AWG

Limited Warranty

1-Year Limited Warranty

BOOST PRODUCT LINE OVERVIEW



GB20 BOOST [®] SPORT [™]	GB40 BOOST [®] PLUS [™]	GB50 BOOST [®] XL [™]	GB70 BOOST [®] HD [™]	GB150 BOOST [®] PRO [™]	GB500 BOOST [®] MAX [™]
500A CURRENT RATING	1000A CURRENT RATING	1500A CURRENT RATING	2000A CURRENT RATING	4000A CURRENT RATING	20000A 12V CURRENT RATING
20X JUMP STARTS PER CHARGE	20X JUMP STARTS PER CHARGE	30X JUMP STARTS PER CHARGE	40X JUMP STARTS PER CHARGE	80X JUMP STARTS PER CHARGE	400X JUMP STARTS PER CHARGE
4.0L GAS ONLY	6.0L GAS 3.0L DIESEL	7.0L GAS 4.5L DIESEL	8.0L GAS 6.0L DIESEL	10.0L GAS & DIESEL	CLASS 8+/CE GAS & DIESEL
100 LUMEN FLASHLIGHT	100 LUMEN FLASHLIGHT	200 LUMEN FLASHLIGHT	400 LUMEN FLASHLIGHT	800 LUMEN FLASHLIGHT	2200 LUMEN FLASHLIGHT
USB IN & OUT	USB IN & OUT	USB IN & OUT	USB IN & OUT	USB IN & OUT	USB (X2) IN & OUT
			12V SUPPLY MODE	12V SUPPLY MODE	12V SUPPLY MODE
			36W FAST CHARGE	56W FAST CHARGE	56W FAST CHARGE
				INTEGRATED VOLTMETER	INTEGRATED VOLTMETER
					24V BATTERY MODE



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

NOCO BOOST[®] ACCESSORIES



GBC001
HD Boost
Battery Clamps



GBC002
Precision Boost Sport
Battery Clamps



GBC003
Boost Battery Clamps
w/ Integrated Eyelets



GBC004
Boost MAX
Battery Clamps



GBC005
Boost MAX 72-Inch
Battery Clamps



NUSB211NA
10W USB
Speed Charger



GBC007
Boost Eyelet Cable w/
X-Connect Adapter



GBC009
Boost Eyelet Cable w/
SAE Adapter



GBC010
Boost 12V
Accessory Kit



GBC012
Boost Settings
Keeper



XGC4
56W XGC Power
Adapter

NOCO BOOST[®] ACCESSORIES



GBC013

EVA Protective Case For
Boost Sport + Boost Plus



GBC017

EVA Protective
Case For Boost XL



GBC014

EVA Protective
Case For Boost HD



GBC015

EVA Protective Case
For Boost PRO



GBC016

EVA Protective Case
For Boost MAX

GBC001 PRECISION BOOST BATTERY CLAMPS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



8 AWG
SILICONE CABLE

COMPATIBLE
WITH GB20, GB30, GB40,
AND GB50

**GBC001 HEAVY DUTY BATTERY CLAMP DESIGN FOR POWERSPORT
AND REMOTE BATTERY APPLICATIONS.**

**BOOST FEMALE
CONNECTOR**



What's In The Box

- GBC001 HD Boost Battery Clamps

Inner Carton:

Dimensions: 4.01"x8.78"x5.12"
Weight: 2.87lbs

Master Carton:

Dimensions: 15.50"x24.50"x14."
Weight: 17.80lbs
Quantity: 12
UCC: 10046221160052

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC: 0-46221-16005-5

Units Per Pallet:

280 Units

NOCO

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 36

GBC002 PRECISION BOOST SPORT BATTERY CLAMPS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES




8 AWG
SILICONE CABLE

COMPATIBLE
WITH GB20, GB30, GB40,
AND GB50



GBC002 PRECISION NEEDLE-NOSE BATTERY CLAMP DESIGN FOR POWERSPORT AND REMOTE BATTERY APPLICATIONS.

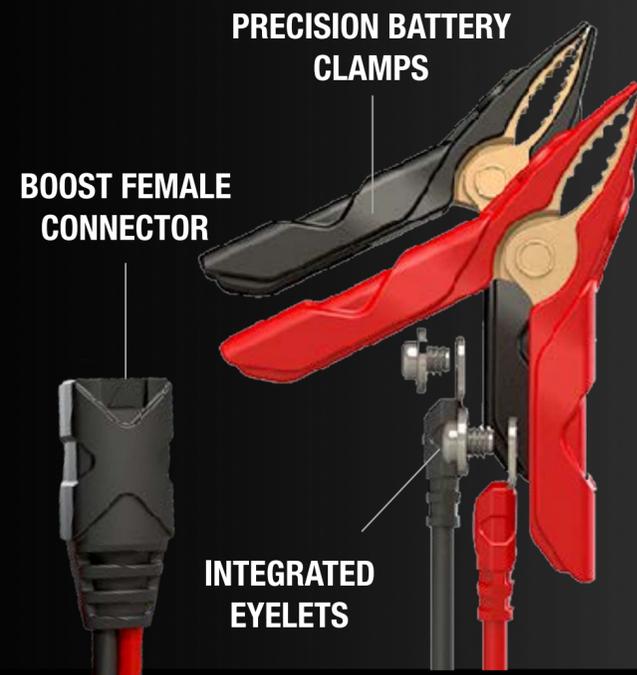

What's In The Box

- GBC002 Precision Boost Sport Battery Clamps w/ Integrated Eyelets

Inner Carton:

Dimensions: 9.50"x3.00"x5.50"
Weight: 0.65lbs

Master Carton:

Dimensions: 15.50"x24.50"x14.00"
Weight: 10.60lbs
Quantity: 12
UCC: 10046221160069

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC: 0-46221-16006-2

Units Per Pallet:

280 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.



GBC003 HD PRECISION BOOST BATTERY CLAMPS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



8 AWG
SILICONE CABLE

COMPATIBLE
WITH GB20, GB30, GB40,
AND GB50

HD PRECISION
BATTERY CLAMPS

BOOST FEMALE
CONNECTOR



GBC003 HEAVY DUTY BATTERY CLAMPS WITH NEEDLE-NOSE DESIGN FOR JUMP STARTING HARD-TO-REACH AND OVERSIZED BATTERY TERMINALS.



What's In The Box

- GBC003 HD Precision BOOST Battery Clamps

Inner Carton:

Dimensions: 4.01"x8.78"x5.12"
Weight: 2.87lbs

Master Carton:

Dimensions: 9.25"x12.60"x11.22"
Weight: 18.08lbs
Quantity: 6
UCC: 10046221190141

Retail Packaging

Dimensions: 3.62"x4.57"x8.27"
Weight: 2.69lbs
UPC: 0-46221-19014-4

Units Per Pallet:

270 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

GBC004 BOOST MAX BATTERY CLAMPS



2/0 AWG
SILICONE CABLE

COMPATIBLE
WITH GB500 BOOST
MAX JUMP STARTER

CAMLOCK MALE
CONNECTOR



BOOST MAX CLAMP




GBC004 ARE HEAVY DUTY BATTERY CLAMPS DESIGNED FOR 12V AND 24V GAS AND DIESEL ENGINES IN CLASS 8+/CE HIGH DISPLACEMENT VEHICLES AND EQUIPMENT.

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES

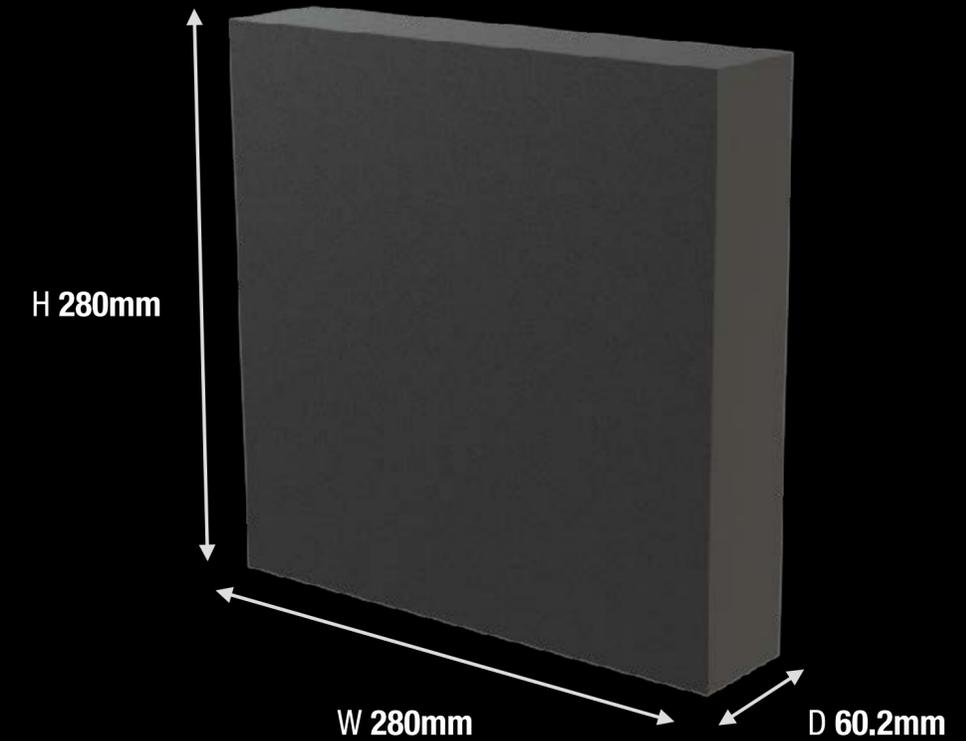

What's In The Box

- (1) 24in POS (+) Cable with Boost MAX Connector
- (1) 24in NEG (-) Cable with Boost MAX Connector

Inner Carton:

Dimensions: 15.28"x12.52"x12.76"
Weight: 5.95lbs

Master Carton:

Dimensions: 15.83"x12.99"x14.96"
Weight: 31.97lbs
Quantity: 5
UCC: 10046221180067

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC: 0-46221-18006-0

Units Per Pallet:

225 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

GBC005 BOOST MAX 72-INCH BATTERY CLAMPS

JUMPSTARTERS

ACCESSORIES


CABLES

EVA CASES



2/0 AWG
SILICONE CABLE

COMPATIBLE
WITH GB500 BOOST
MAX JUMP STARTER

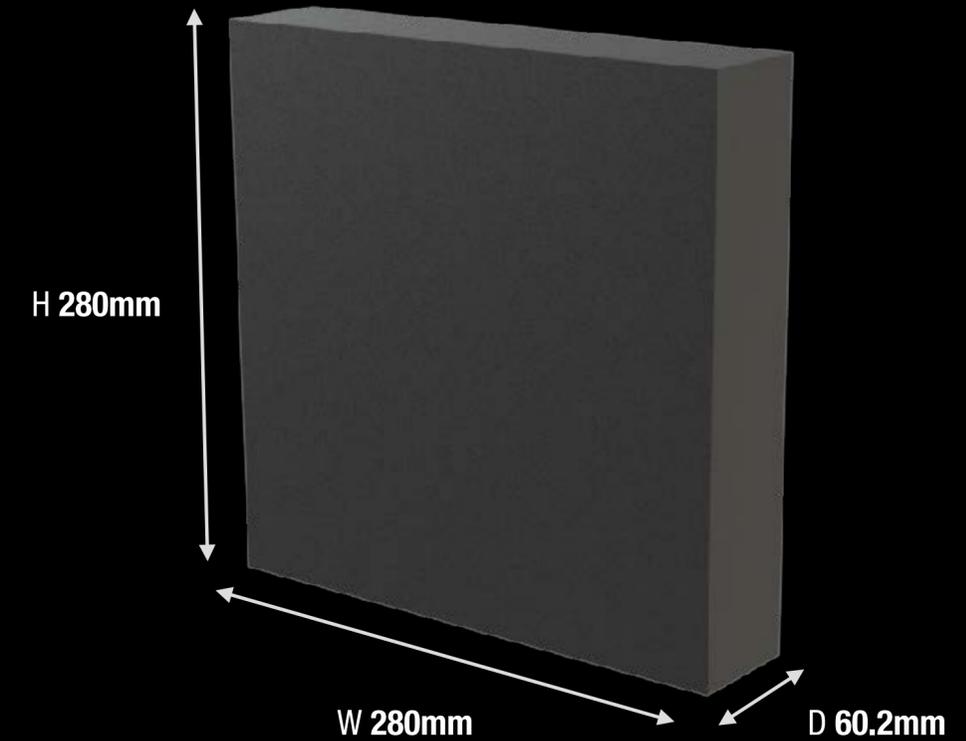

CAMLOCK MALE
CONNECTOR

BOOST MAX CLAMP



GBC005 ARE 72-INCH HEAVY DUTY BATTERY CLAMPS DESIGNED FOR 12V AND 24V GAS AND DIESEL ENGINES IN CLASS 8+/CE HIGH DISPLACEMENT VEHICLES AND EQUIPMENT.

What's In The Box

- (1) 72in POS (+) Cable with Boost MAX Connector
- (1) 72in NEG (-) Cable with Boost MAX Connector

Inner Carton:

Dimensions: 11.03"x11.03"x2.37"
Weight: 4.52lbs

Master Carton:

Dimensions: 13.00"x11.42"x11.82"
Weight: 23.77lbs
Quantity: 6
UCC: 10046221190011

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC: 0-46221-19001-4

Units Per Pallet:

288 Units



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

NUSB211NA 10W USB SPEED CHARGER

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



UL LISTED
SAFE & EFFICIENT

10W SPEED
CHARGE

COMPATIBLE
W/ NOCO BOOST

USB DEVICE
CHARGING

NUSB211NA IS AN ULTRA-COMPACT 10W USB WALL ADAPTER TO CHARGE USB DEVICES AT HOME, WORK, OR ON THE GO.



What's In The Box

- NOCO 10W USB Speed Charger (AC Type A Plug, North America [NA])

Inner Carton:

Dimensions: 5.35"x1.81"x3.70"
Weight: 0.19lbs

Master Carton:

Dimensions: 12.32"x11.34"x12.40"
Weight: 17.84lbs
Quantity: 36
UCC: 10046221170150

Retail Packaging

Dimensions: 3.23"x1.57"x5.12"
Weight: 0.13lbs
UPC: 0-46221-17015-3

Units Per Pallet:

1728 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 41

NOCO

GBC007 BOOST EYELET CABLE W/ X-CONNECT ADAPTER



8 AWG
SILICONE CABLE

COMPATIBLE
WITH GB20, GB30, GB40
AND GB50

EYELETS

SAE CONNECTOR

BOOST FEMALE
CONNECTOR



THE NOCO GBC007 EYELETS CAN BE HARD-MOUNTED FOR QUICK
AND CONVENIENT CHARGING OR JUMP STARTING.



What's In The Box

- GBC007 Boost Eyelet Cable with X-Connect Adapter

Inner Carton:

Dimensions: 3.50"x1.81"x5.35"
Weight: 0.57lbs

Master Carton:

Dimensions: 17.75"x8.25"x12.75"
Weight: 20.48lbs
Quantity: 36
UCC: 10046221160175

Retail Packaging

Dimensions: 3.23"x1.57"x5.12"
Weight: 0.51lbs
UPC: 0-46221-16017-8

Units Per Pallet:

2160 Units

GBC009 BOOST EYELET CABLE WITH SAE ADAPTER



8 AWG
SILICONE CABLE

COMPATIBLE
WITH GB20, GB30, GB40
AND GB50

EYELETS

SAE CONNECTOR

BOOST FEMALE
CONNECTOR



THE NOCO GBC009 EYELETS CAN BE HARD-MOUNTED FOR QUICK AND CONVENIENT SAE CHARGING OR JUMP STARTING.



What's In The Box

- GBC009 Boost Eyelet Cable with SAE Adapter

Inner Carton:

Dimensions: 3.50"x1.81"x5.35"
Weight: 0.56lbs

Master Carton:

Dimensions: 17.75"x8.25"x12.75"
Weight: 20.15lbs
Quantity: 36
UCC: 10046221160182

Retail Packaging

Dimensions: 3.23"x1.57"x5.12"
Weight: 0.51lbs
UPC: 0-46221-16018-5

Units Per Pallet:

2160 Units

GBC010 BOOST 12V ACCESSORY KIT

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



16 AWG

COMPATIBLE WITH GB70, GB150 AND GB500

12V Male Adapter

12V Female Adapter



XGC Cable

THE NOCO GBC010 12V ACCESSORY KIT CONNECTS DIRECTLY TO THE NOCO BOOST JUMP STARTER'S XGC IN AND OUT PORTS.



What's In The Box

- (1) 12V Male Adapter
- (1) 12V Female Adapter
- (1) XGC Cable

Inner Carton:

Dimensions: 3.70"x1.88"x5.43"
Weight: 0.24lbs

Master Carton:

Dimensions: 12.44"x11.49"x12.36"
Weight: 8.02lbs
Quantity: 36
UCC: 10046221180074

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC:0-46221-18007-7

Units Per Pallet:

2160 Units

NOCO®

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 44

GBC012 OBD-II 12V BOOST SETTINGS KEEPER



16 AWG

COMPATIBLE WITH GB70, GB150, AND GB500

OBD II Connector



XGC IN



GBC012 BOOST SETTINGS KEEPER ALLOWS YOU TO DISCONNECT YOUR VEHICLE'S BATTERY WITHOUT LOSING ONBOARD ELECTRONIC SETTINGS.

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



What's In The Box

- GBC012 ODB-II 12V Boost Settings Keeper

Inner Carton:

Dimensions: 3.50"x1.81"x5.35"
Weight: 0.27lbs

Master Carton:

Dimensions: 17.75"x8.25"x12.75"
Weight: 11.82lbs
Quantity: 36
UCC: 10046221170174

Retail Packaging

Dimensions: 3.23"x1.57"x5.12"
Weight: 0.21lbs
UPC: 0-46221-17017-7

Units Per Pallet:

2160 Units

NOCO®

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 45

XGC4 56W XGC POWER ADAPTER



XGC4 IS A 56-WATT POWER ADAPTER FOR RAPIDLY RECHARGING NOCO BOOST ULTRA SAFE LITHIUM JUMP STARTERS.

UP TO 5X FASTER CHARGE THAN 2A USB

COMPATIBLE WITH GB70, GB150, AND GB500



JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



What's In The Box

- XGC4 56W XGC Power Adapter

Inner Carton:

Dimensions: 4.72"x3.31"x8.66"
Weight: 1.78bs

Master Carton:

Dimensions: 17.95"x9.92"x14.33"
Weight: 29.10lbs
Quantity: 16
UCC: 10046221170303

Retail Packaging

Dimensions: 4.49"x2.64"x8.19"
Weight: 0.96lbs
UPC: 0-46221-17030-6

Units Per Pallet:

576 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

GBC013 EVA PROTECTIVE CASE FOR BOOST SPORT/PLUS



SEMI-RIGID
DURABLE & RUGGED

PROTECTION
IMPACT RESISTANT
PORTABLE STORAGE

COMPATIBLE
W/ GB20, GB30, + GB40


ACCESSORY
ADDITIONAL POCKETS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES

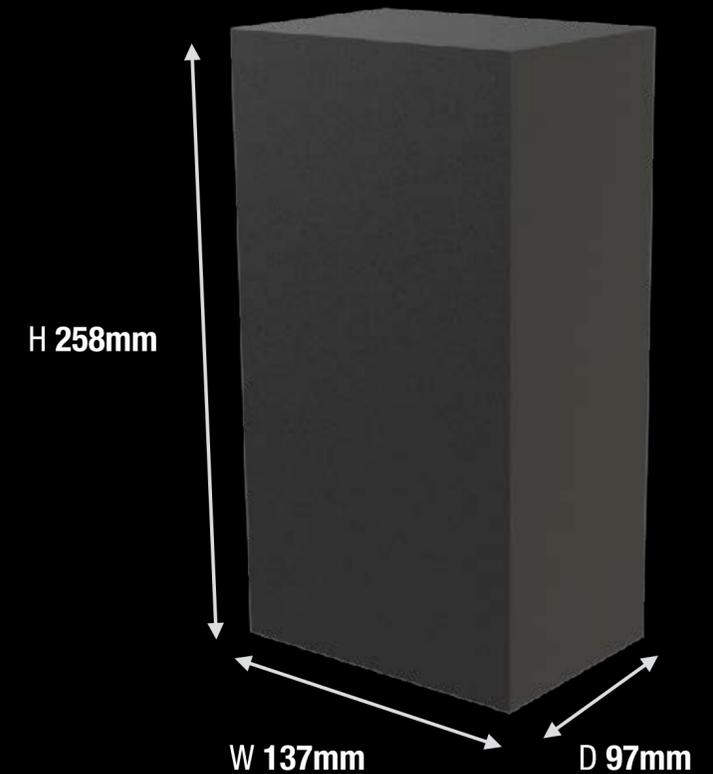

What's In The Box
• GBC013 Protective Case

Inner Carton:
Dimensions: 10.47"x3.94"x6.26"
Weight: 1.03lbs

Master Carton:
Dimensions: 19.49"x10.83"x8.46"
Weight: 7.11lbs
Quantity: 6
UCC: 10046221170273

Retail Packaging
Dimensions: 10.16"x3.82"x5.43"
Weight: 0.78lbs
UPC: 0-46221-17027-6

Units Per Pallet:
300 Units

NOCO

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 47

GBC017 EVA PROTECTIVE CASE FOR BOOST XL



SEMI-RIGID
DURABLE & RUGGED

PROTECTION
IMPACT RESISTANT
PORTABLE STORAGE

COMPATIBLE
WITH GB50 BOOST XL


ACCESSORY
ADDITIONAL POCKETS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES

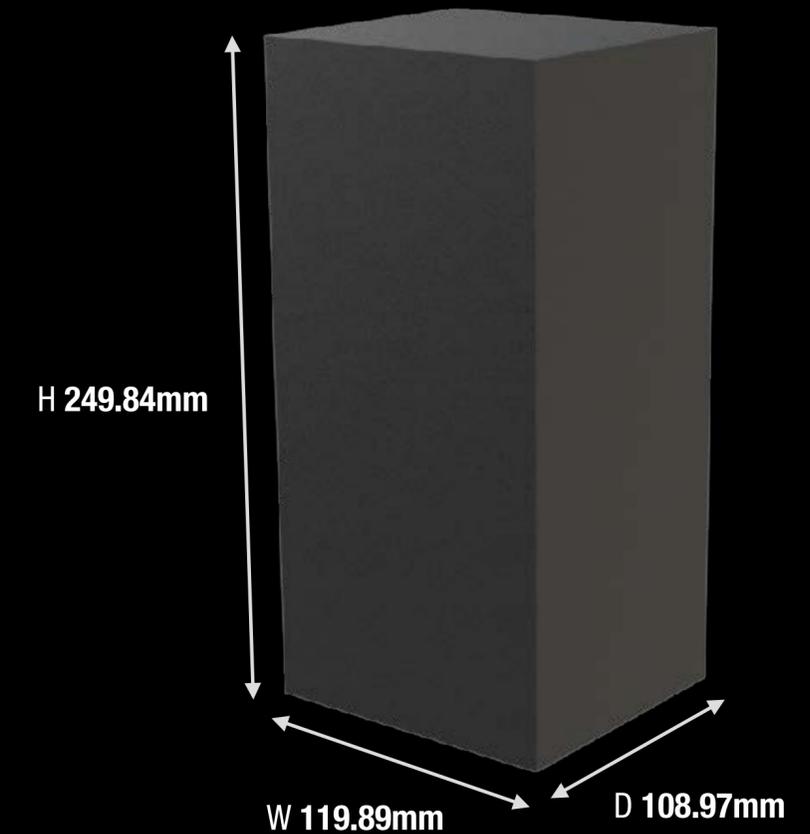

What's In The Box

- GBC017 Boost XL EVA Protective Case

Inner Carton:

Dimensions: 10.43"x6.22"x4.92"
Weight: 1.01lbs

Master Carton:

Dimensions: 19.49"x10.79"x10.39"
Weight: 7.25lbs
Quantity: 6
UCC: 10046221180166

Retail Packaging

Dimensions: 9.84"x4.72"x4.29"
Weight: 0.75lbs
UPC: 0-46221-18016-9

Units Per Pallet:

324 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 48

NOCO

GBC014 EVA PROTECTIVE CASE FOR BOOST HD



SEMI-RIGID
DURABLE & RUGGED

PROTECTION
IMPACT RESISTANT
PORTABLE STORAGE

COMPATIBLE
WITH GB70 BOOST HD

ACCESSORY
ADDITIONAL POCKETS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



What's In The Box

- GBC014 Boost HD EVA Protective Case

Inner Carton:

Dimensions: 12.40"x7.87"x5.28"
Weight: 1.80lbs

Master Carton:

Dimensions: 16.40"x12.68"x11.30"
Weight: 8.30lbs
Quantity: 4
UCC: 10046221170280

Retail Packaging

Dimensions: 12.36"x5.43"x7.64"
Weight: 1.4lbs
UPC: 0-46221-17028-3

Units Per Pallet:

180 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 49

NOCO

GBC015 EVA PROTECTIVE CASE FOR BOOST PRO



SEMI-RIGID
DURABLE & RUGGED

PROTECTION
IMPACT RESISTANT
PORTABLE STORAGE

COMPATIBLE
WITH GB150 BOOST PRO

ACCESSORY
ADDITIONAL POCKETS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES



What's In The Box

- GBC015 Boost Pro EVA Protective Case

Inner Carton:

Dimensions: 14.25"x5.51"x9.53"
Weight: 2.36lbs

Master Carton:

Dimensions: 14.69"x11.42"x10.12"
Weight: 5.80lbs
Quantity: 2
UCC: 10046221170297

Retail Packaging

Dimensions: 14.65"x5.43"x8.74"
Weight: 1.76lbs
UPC: 0-46221-17029-0

Units Per Pallet:

100 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 50

NOCO

GBC016 EVA PROTECTIVE CASE FOR BOOST MAX



SOFTCASE
DURABLE & RUGGED

PROTECTION
IMPACT RESISTANT
PORTABLE STORAGE

COMPATIBLE
WITH GB500 BOOST MAX


ACCESSORY
ADDITIONAL POCKETS

JUMPSTARTERS

ACCESSORIES

CABLES

EVA CASES

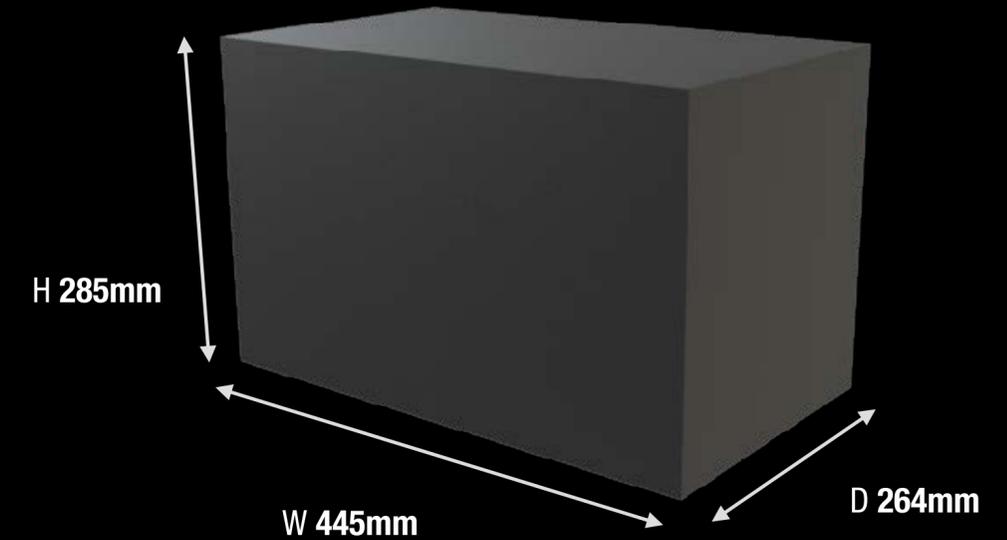

What's In The Box

- GBC016 Boost MAX EVA Protective Case

Inner Carton:

Dimensions: 17.95"x11.22"x10.43"
Weight: 4.08lbs

Master Carton:

Dimensions: 23.23"x18.11"x11.22"
Weight: 11.02lbs
Quantity: 2
UCC: 10046221180081

Retail Packaging

Dimensions: N/A
Weight: N/A
UPC: 0-46221-18008-4

Units Per Pallet:

10 Units

PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.

V10.08.19A 51

NOCO

NOCO BOOST®



PROPRIETARY AND CONFIDENTIAL. COPYRIGHT © 2019 THE NOCO COMPANY

THIS DOCUMENT CONTAINS PROPRIETARY, CONFIDENTIAL, COPYRIGHTED, AND TRADE SECRET INFORMATION OF THE NOCO COMPANY AND ITS AFFILIATED COMPANIES ("NOCO"). ALL MATERIAL, INFORMATION, AND CONTENT ARE THE PROPERTY OF NOCO, AND NOCO RETAINS ALL RIGHT, TITLE, AND INTEREST THEREIN. THIS DOCUMENT MAY NOT BE COPIED, DISSEMINATED, DISCLOSED, PUBLISHED, DIVULGED, OR REPRODUCED, IN WHOLE OR IN PART, WITHOUT THE PRIOR WRITTEN CONSENT OF NOCO. TITLE IN AND TO THIS DOCUMENT (NO MATTER IF IN PRINTED, ELECTRONIC, OR ANY OTHER FORM) AND ALL INFORMATION CONTAINED HEREIN REMAINS AT ALL TIMES IN NOCO. NO INTELLECTUAL PROPERTY RIGHTS ARE TRANSFERRED TO YOU BY ACCESS TO THIS DOCUMENT OR OTHERWISE.